

BL1602H



Feature

1. OLED Display
2. COB with metal frame
3. 5x7 dots with cursor
4. Software command same as KS0066
5. + 5V single power supply
6. 1/16 duty cycle
7. Color: yellow green

Mechanical Data

Item	Standard Value	Unit
Module Dimension	84.0 x 44.0	mm
Viewing Area	66.0 x 16.0	mm
Dot Size	0.51 x 0.63	mm
Character Size	2.67 x 5.01	mm




Pin Assignment

Pin	Symbol	Function
1	Vss	GND
2	Vdd	+5V
3	VBT	Brightness Adjustmet (+2.8V)
4	RS	H/L register select signal
5	R/W	H/L read/write signal
6	E	H --> L enable signal
7 ~ 14	DB0 ~ 7	H/L data bus line
15	NC	
16	NC	

Electronic Characteristics

Item	Symbol	Condition	Typical Value	Unit
Input Voltage	Vdd	Vdd = +5V	5.0	V
Supply Current	Idd	Vdd = +5V	100	mA
Pixel Brightness	lu	Vbt = +2.8V	35	cd/m ²

Dimension

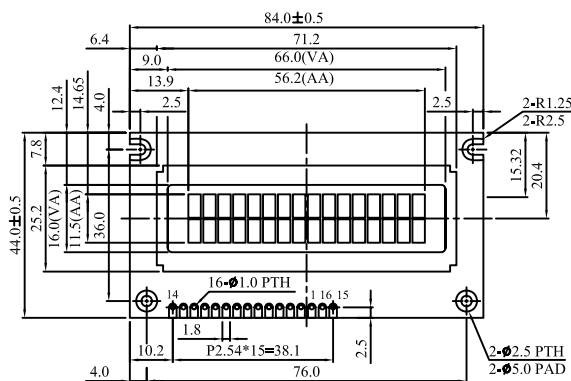

PIN NO.	SYMBOL
1	Vss
2	Vdd
3	Vo
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	
16	

